

Ridge Flashing

Rivets/Screw Fixings Applied As Per Code Of Practice To Any Flashing Join

Screw Fixings In Existing Purlin: Ensure All Screw Fixings Are Installed Into The Existing Purlin.
Penetration Point: Screw Fixings Should Only Penetrate Through The Top Of The Rib

Atop Measurement Folded to Individual Roofing Profile

Proprietary Designed Flashing System by Suntrenz Skylights

Seal Flashing Joints: Ensure Both Ends Of Each Lap Are Fully Sealed.
Fastener Placement: Position Each Fastener So It Passes Through The Sealant At The Leading Edge
Fastener Spacing: Space Fasteners No More Than 50mm Apart Along The Join.
Lap Length: Maintain A Minimum Lap Length Of 150mm



120mm

45mm

Rivet Fixing Into Top Point Of Roof Rib

Long Run Roofing


Installed By A Suntrenz Certified/Trained Installer.

Front of Suntube Flashing Notched into Roofing Pan

Minimum Cover 200mm

	New Zealand 0508 777 222	
	Ph: 0508 777 222 Email: sales@suntrenz.co.nz	

Installed By Suntrenz
Certified/Trained Installers

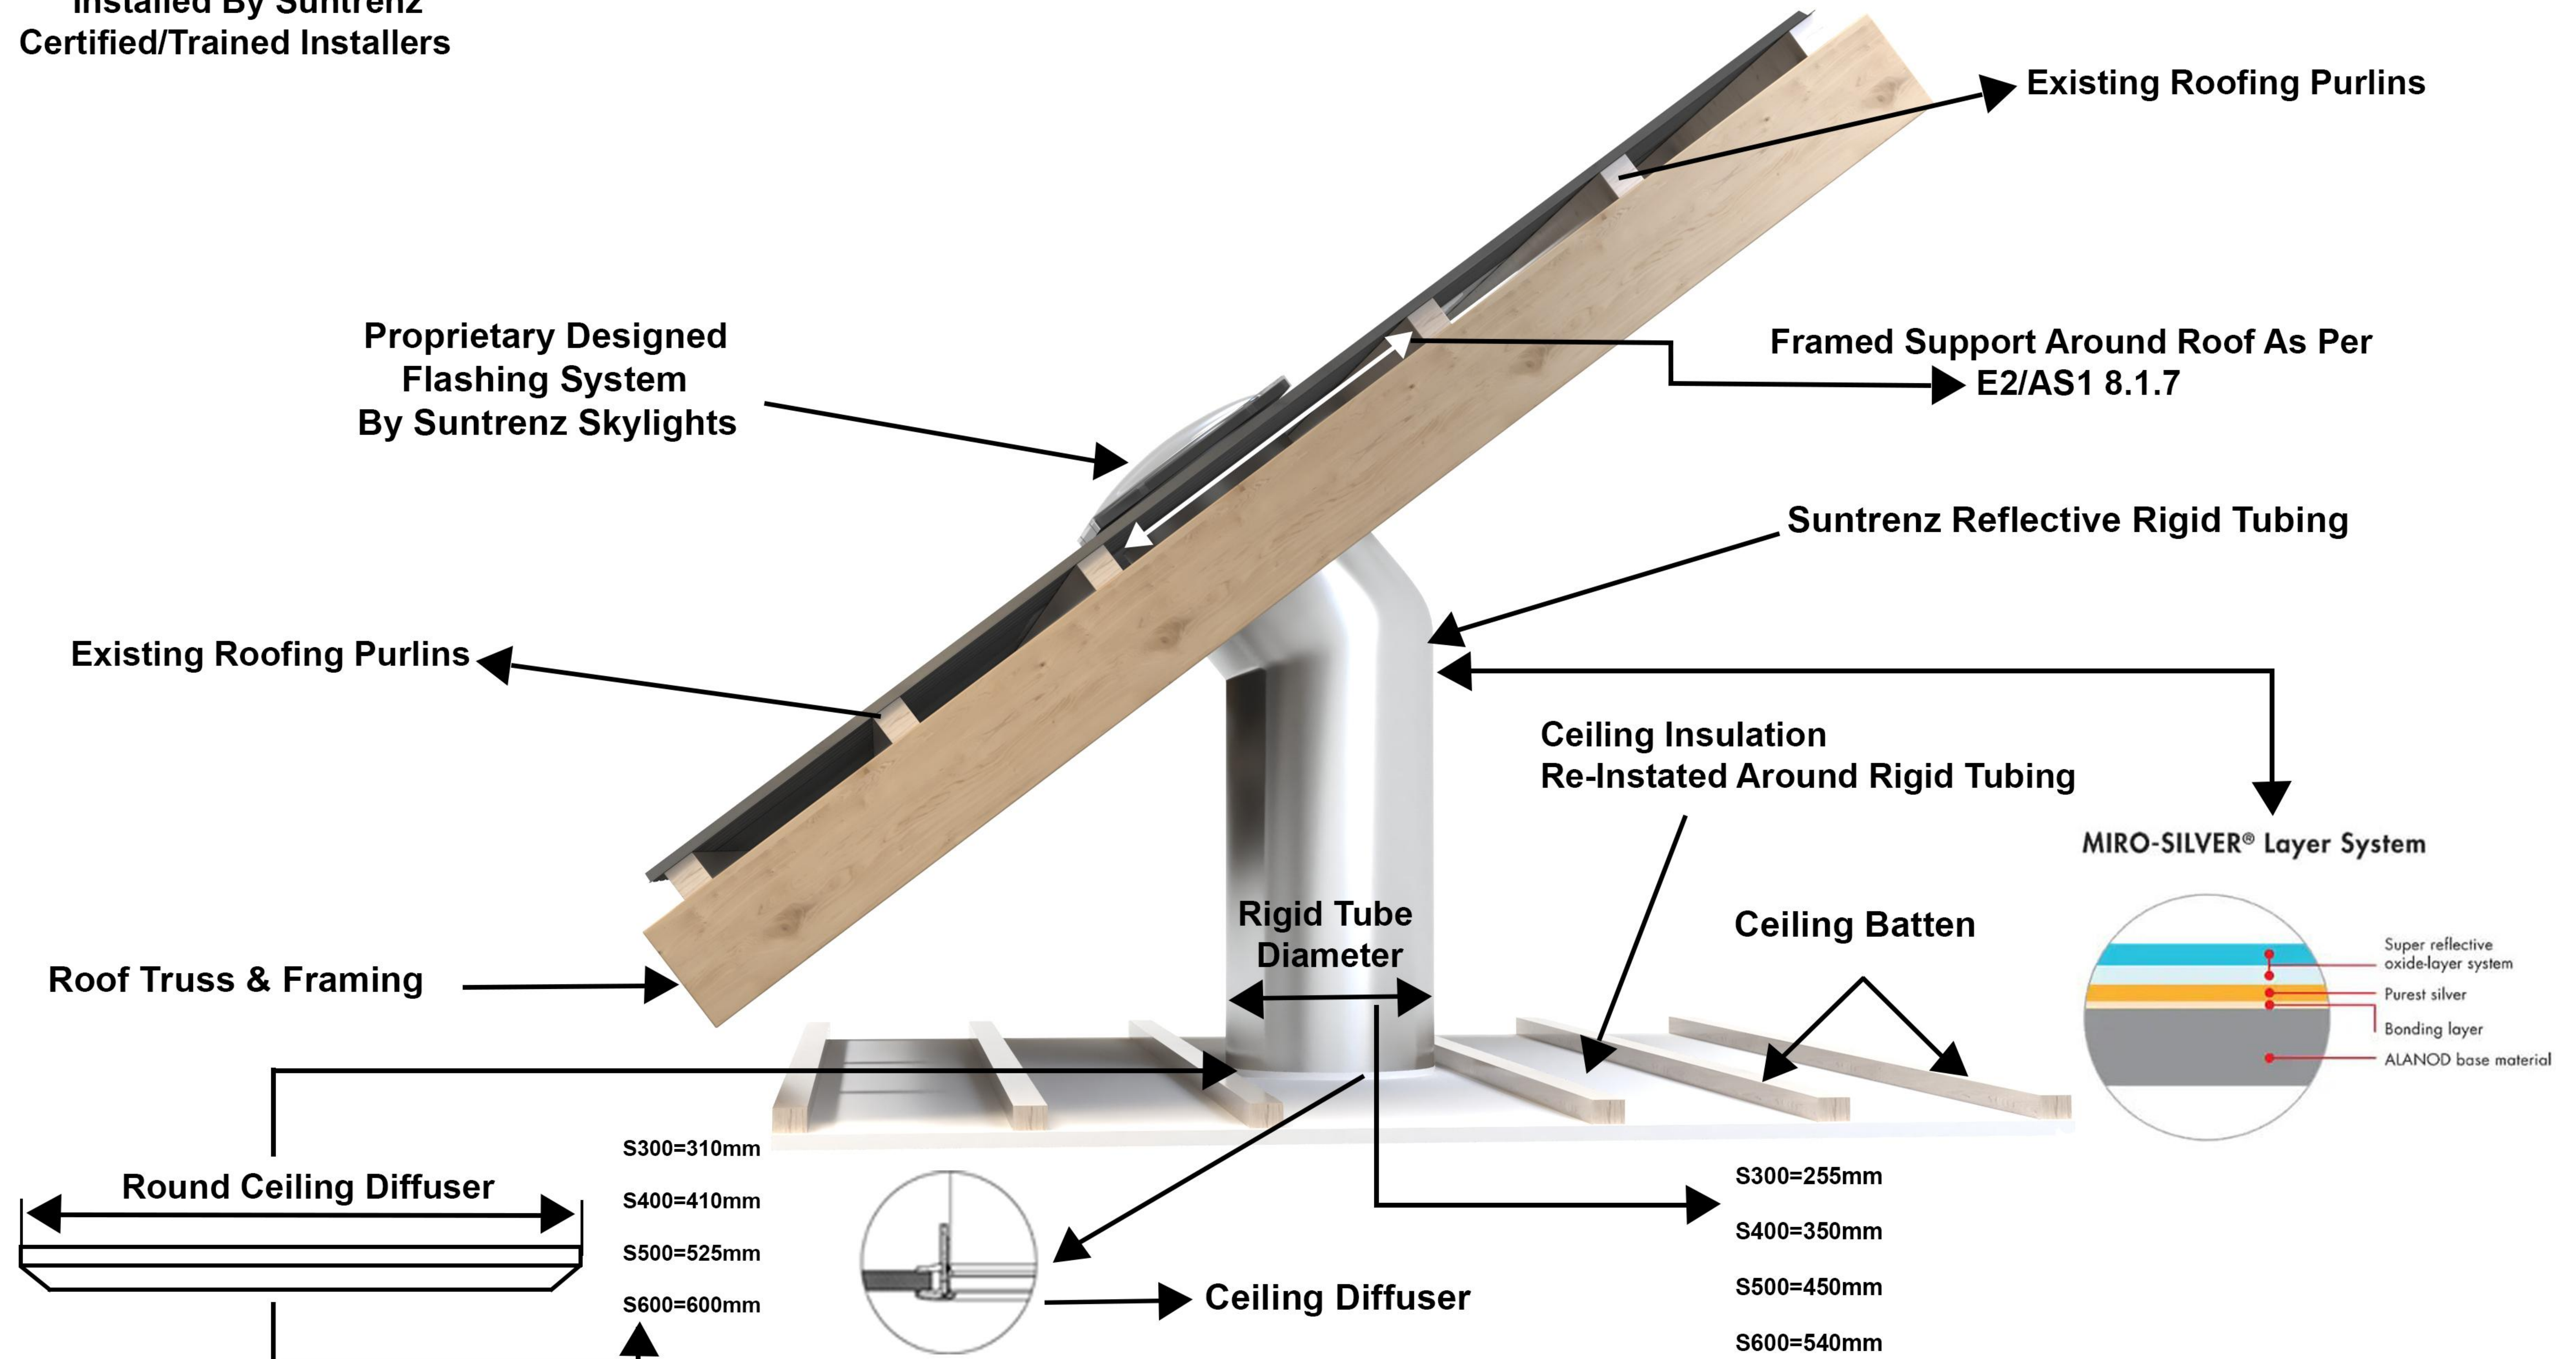

Suntube with Rigid98



- 1) **DOMES** – U.V. Stabilized Grade 1 Acrylic (Altuglas – HFI7) or Specialised UV Grade Polycarbonate (Sabic SLX)
- 2) **SCREWS x 8** – to fasten Dome (Class 3 corrosion resistant).
- 3) **VENT/SOLID TABS** – ASA Polymer (Luran S 778 T).
- 4) **BREATHER FRAME** – ASA Polymer (Luran S 778 T).
- 5) **SEAL** – Construction Grade Polyurethane (Bostik Seal'N'Flex 1).
- 6) **SOAKER TRAY** – 55 Colourbond/Fibreglass/UV Stabilised ABS Thermoplastic
- 7) **UPPER RING** – Rigid98 (Miro Silver).
- 8) **ANGLE ADAPTOR: upto 45° or 90°** – Rigid98 (Miro Silver).
- 9) **RIGID LENGTHS: 625mm or 1250mm** – Rigid98 (Miro Silver).
- 10) **LOWER RING** – Rigid98 (Miro Silver).
- 11) **LOCKING RING** – White ABS Thermoplastic (BASF GP22).
- 12) **CEILING FRAME** – White ABS Thermoplastic (BASF GP22).
- 13) **DIFFUSERS x 2** – 3mm PMMA (Acrylic) with Seadrift texture.
- 14) **DIFFUSER HOLDER** – White ABS Thermoplastic (BASF GP22).
- 15) **SCREWS** – to retain Flexi-tube Locking Ring to Ceiling Frame.
- 16) **SCREWS** – to fasten Ceiling Frame, includes lock lug and cover cap
- 17) **MAGNET** – N45 Grade / Rare Earth (Neodymium Iron Boron).
- 18) **FOAM SEAL** – 3mm x 6mm Foam.
- 19) **REFLECTIVE RING** – 0.45mm 430BA Stainless Steel.
- 20) **TAPE** – PVC Duct Tape (TESA 4050).
- 21) **FLEXI-TUBE** – Composite 3 layers including metalized polyester, aluminium foil and spring wire.

Suntube with Flexi-Tube

